


Movement by Perfection



The Royal League in ventilation, control and drive technology

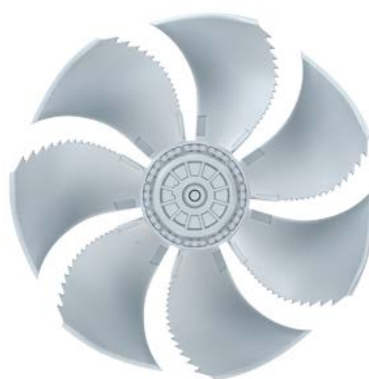

### Product documentation

Type  
FN056-VDA.4M.V7P2

Article number  
175774

## Product documentation


Customer

Project  
Station One

ZIEHL-ABEGG Subsidiary  
Headquarters  
ZIEHL-ABEGG SE  
Heinz-Ziehl-Straße  
74653 Künzelsau  
Tel. 07940 16-0  
Fax 07940 16-300  
info@ziehl-abegg.de  
www.ziehl-abegg.de

Type  
FN056-VDA.4M.V7P2

Article number  
175774

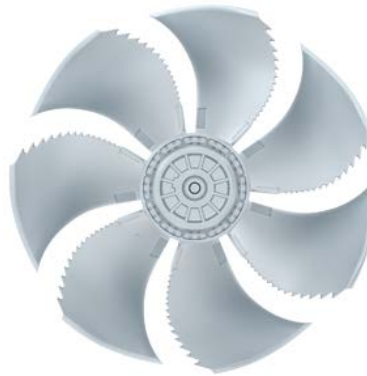

### Contents

1.	Product specification	3
2.	Characteristic curve	4
3.	Drawing	6
4.	Connection diagram	7
5.	General product and handling description	8

### 1. Product specification

#### Technical data


Article number	175774
Type	FN056-VDA.4M.V7P2
Designation	Axial fan with sickle blades
Rated values	3~400V±10% D/Y 50Hz P <sub>1</sub> 1,05/0,58kW 2.20/ 1.10A ΔI=0% 1280/910/min COSY 0,68 70°C 3~400V±10% D/Y 60Hz P <sub>1</sub> 1,35/0,58kW 2,60/ 1,15A ΔI=0% 1320/ 830/min COSY 0,73 55°C 3~460V±10% D/Y 60Hz P <sub>1</sub> 1,55/0,72kW 2,70/ 1,25A ΔI=0% 1430/ 950/min COSY 0,72 55°C
Electrical connection	Supply cable lateral-diagonal 9x 0,5 mm <sup>2</sup> , 105 cm
Min. operating temperature °C	-40***
Cable quality	Li4G4G-J
Type of protection	IP54
Thermal class	THCL155
Connection diagram	1360-108XA
Rating plate	1x fixed
Fitting position	H/Vu
Motor protection	thermal contact
Quality of bearings	ball bearing with long-time lubrication
Material Rotor	Aluminium
Painting rotor	2 coat painted
colour rotor	RAL 9005 (jet black)
Material blades	Aluminium
Painting impeller	2 coat painted
Colour blades	RAL 9005 (jet black)
Special bearing	Ballbearing in special design
Field of application	Conceived for individual application in railways. Bahnbetrieb
Control	--
Weight kg	12,60
ErP Data	Efficiency $\eta_{statA}$ : 33,7 % Efficiency grade: $N_{actual} = 40,1 / N_{target} = 40^*$ *ErP 2015

\*\*\* Occasional operation  $\leq -20^{\circ}\text{C}$  and in consideration of lowest temperature according to product documentation permissible. For cooling applications with continuous operation  $\leq -20^{\circ}\text{C}$  cold design on request.

## 2. Characteristic curve

Frequency: 50 Hz

Measured in full nozzle without guard grille in installation type A according to ISO 5801.

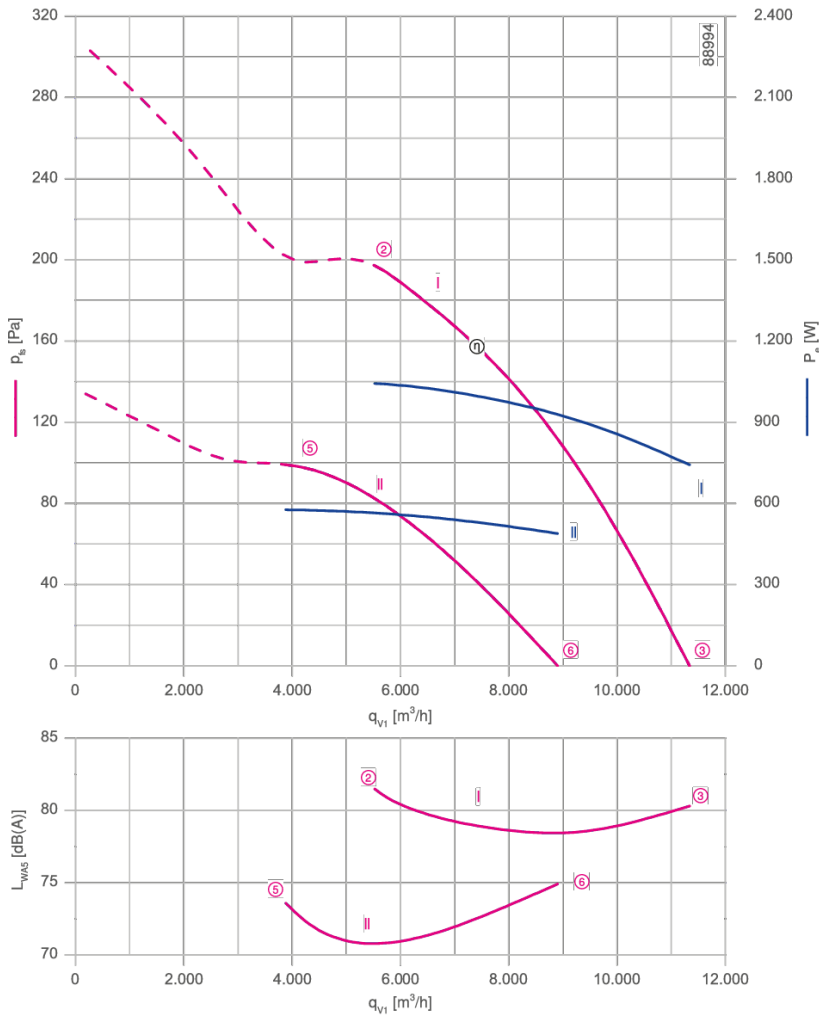


I = 3~400 V D, II = 3~400 V Y

Operating point		①	②	③	④	⑤	⑥
Characteristic curve		I	I	I	II	II	II
Connection		$\Delta$	$\Delta$	$\Delta$	Y	Y	Y
Voltage	V	400	400	400	400	400	400
Input power	W	1300	1050	740	640	580	480
Current	A	2,60	2,20	1,75	1,20	1,10	0,94
Speed	$min^{-1}$	1190	1280	1370	790	910	1080

Frequency: 60 Hz


Measured in full nozzle without guard grille in installation type A according to ISO 5801.

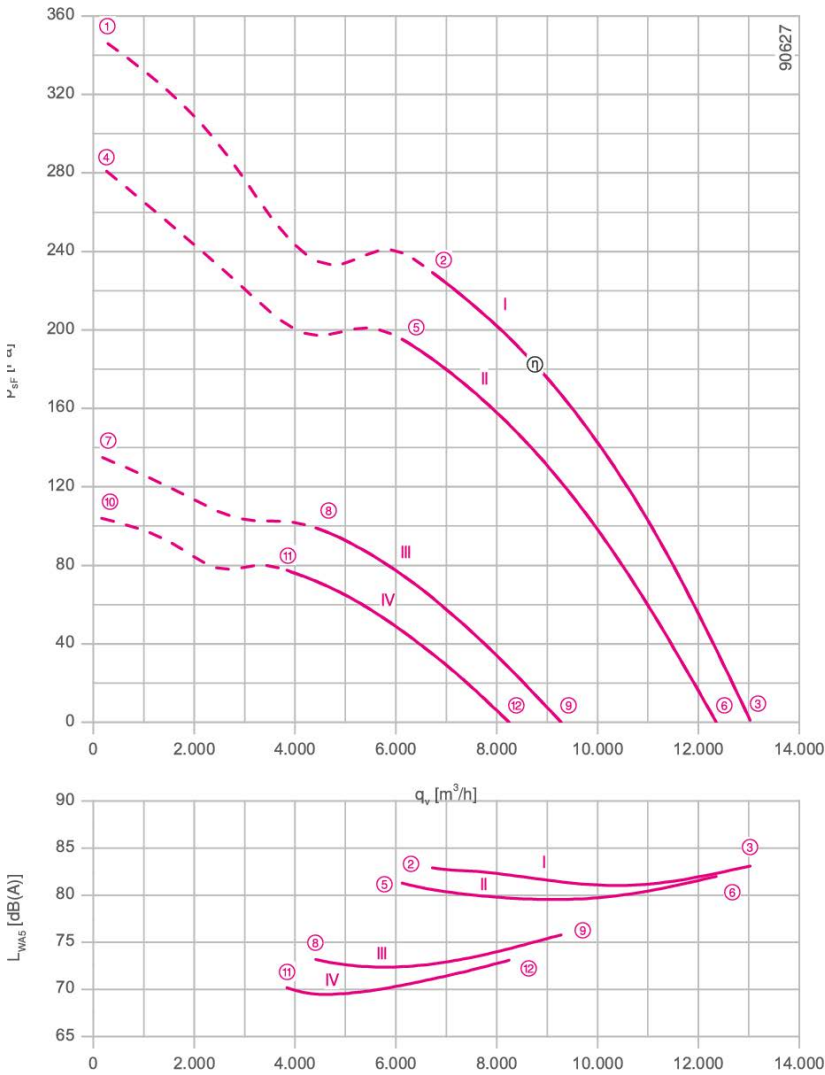

I = 3~460 V D, II = 3~400 V D, III = 3~460 V Y, IV = 3~400 V Y

Operating point	①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪	⑫
Characteristic curve	I	I	I	II	II	II	III	III	III	IV	IV	IV
Connection	Δ	Δ	Δ	Δ	Δ	Δ	Y	Y	Y	Y	Y	Y
Voltage	V	460	460	460	400	400	400	460	460	460	400	400
Input power	W	1850	1550	1150	1550	1350	1050	780	740	660	600	580
Current	A	3,20	2,70	2,10	3,00	2,70	2,10	1,35	1,25	1,10	1,20	1,15
Speed	min <sup>-1</sup>	1280	1420	1570	1150	1310	1490	800	940	1120	700	820

## 3. Drawing

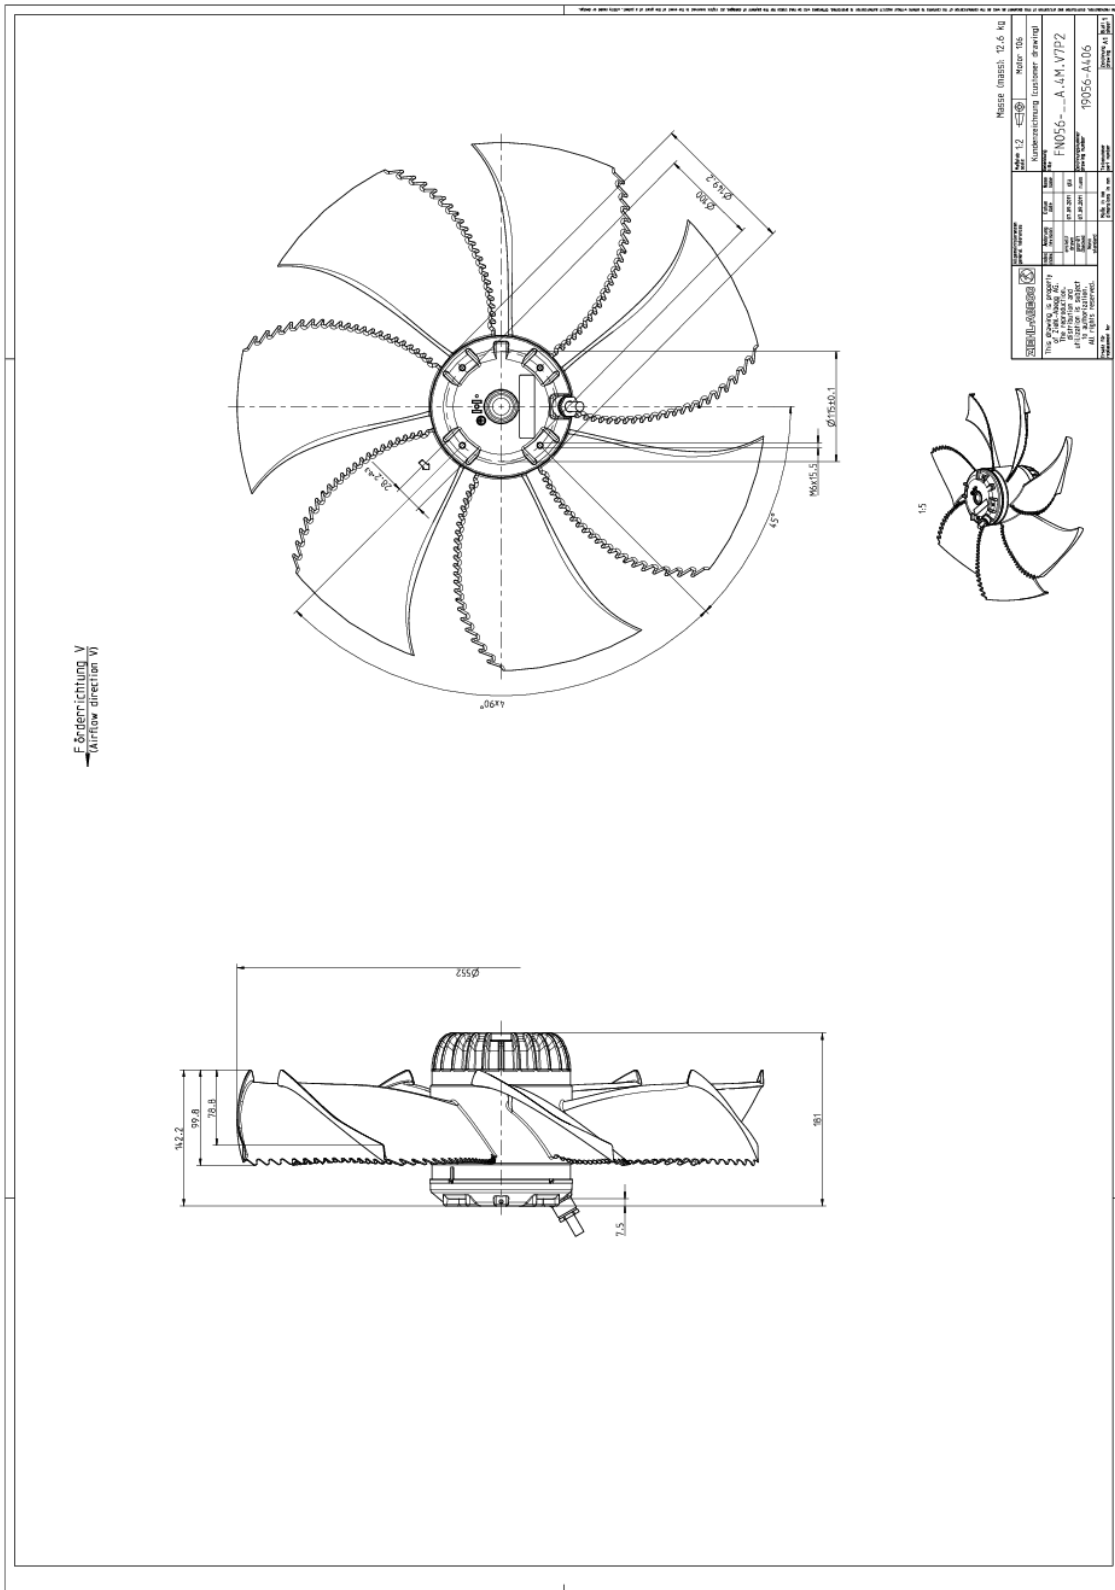

Dimensions in mm  
Shown drawing is just to show the dimensions of the fan.

### 4. Connection diagram


#### 1360-108XA

3~ motor, 2 speeds ( $\Delta/Y$  switch over) with thermostatic switch (if built in). Without bridge when using speed change-over switch.

- BN brown
- BU blue
- BK black
- RD red
- GY grey
- OG orange
- WH white
- GNYE green-yellow

High speed/D-connection

Low speed/Y-connection

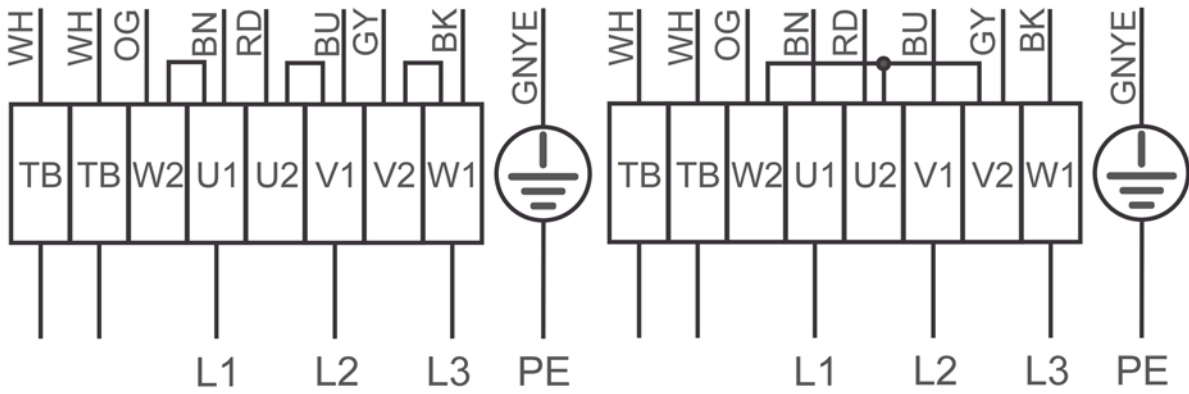

### 5. General product and handling description

#### **Operating conditions:**

The product is designed for conveying non-aggressive, non-explosive, non-fluid, non-adherent, non-abrasive, dust and article-free gaseous media, air-like mixtures und air.

For AC standard fans: The product only works properly with a suitable frequency converter with integrated all-pole active sine filter. The product can be damaged if it's used without an all-pole sine filter between the motor and the frequency converter. Voltage peaks and voltage fluctuations can destroy the product.

To provide error-free operation and prevent damage to the product, the product may only be operated in the admissible operating area according to the above mentioned data sheets and air performance curves.

The formation of small rusty spots during usage in accordance with the product specification and this general product and handling description can occur and does not affect the functionality of the product.

The product must never be used in obviously damaged condition.

Continuous intentional change of direction of rotation is not allowed.

Reverse current braking is not allowed.

#### **Assembly:**

The assembly has to meet the requirements of the assembly instructions to enable error-free operation.

#### **Commissioning:**

Commissioning should be done by appropriately qualified technical personnel according to the specifications in the operating and assembly instructions.

#### **Documentation:**

In case of defective parts or products or in case of any warranty, it may be necessary to analyse the root cause of the defect.

Therefore, ZIEHL-ABEGG may ask for documentation of proper life-cycle handling according to the instructions and the general product and handling description. ZIEHL-ABEGG may ask for appropriate documentation records in order to assess root cause of the defect.

#### **Maintenance and inspection:**

Any maintenance and inspection should be carried out in accordance with the operating and assembly instructions.

#### **Packaging, storage and transport:**

Packaging, storage and transport should be carried out in accordance with the operating and assembly instructions to avoid product damage.

Condensate formation inside the packaging can lead to formation of rust.

Long-term storage of the product should take place in dry environment. Shocks during storage can lead to product damage. Bearing streams should be avoided.

#### **Spare parts:**

In all warranty cases repairs has to be carried out by ZIEHL-ABEGG. In all other cases spare parts shall meet the specifications of the original installed parts to ensure error-free operation. Use of original ZIEHL-ABEGG spare parts is recommended.

#### **Specific application/Intended purpose:**

Suitability of the product for the specific application is beyond control of ZIEHL-ABEGG. Therefore, customer is necessarily obliged to test and approve the product in the application. ZIEHL-ABEGG will not warrant or guarantee any suitability of the product for customer's specific application or intended purpose.



# The Royal League Die Königsklasse



The Royal League in ventilation, control and drive technology

## Intelligent control technology for any application

### ZIEHL-ABEGG system capabilities:

Everything from a single source – perfectly matched for optimal performance

Please contact us. We would be pleased to design an individual solution for your requirements.

We would like to welcome you on our worldwide exhibitions. Please find our next exhibitions [here](#).